

---

# The First-Order Logic of Hyperproperties

Joint work with Bernd Finkbeiner (Saarland University)

Martin Zimmermann


Saarland University

April, 6th 2017


Leibniz Universität Hannover, Hannover, Germany

# Hyperproperties

---

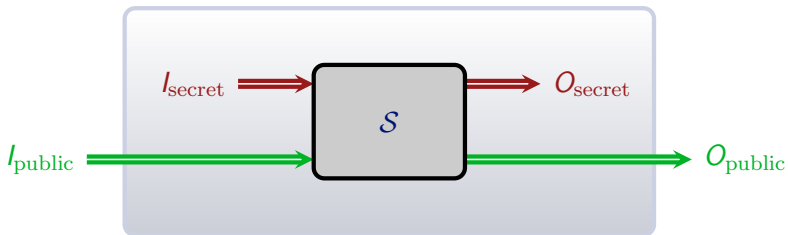


# Hyperproperties

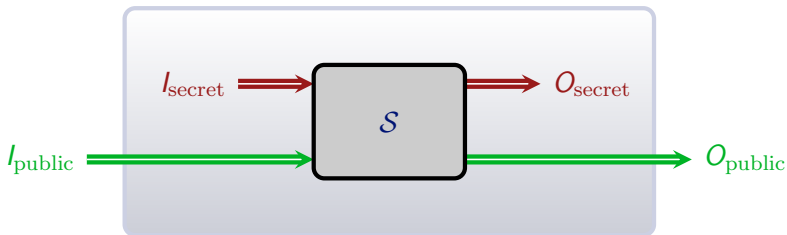

- The system  $\mathcal{S}$  is input-deterministic: for all traces  $t, t'$  of  $\mathcal{S}$   
 $t =_I t'$  implies  $t =_O t'$

# Hyperproperties

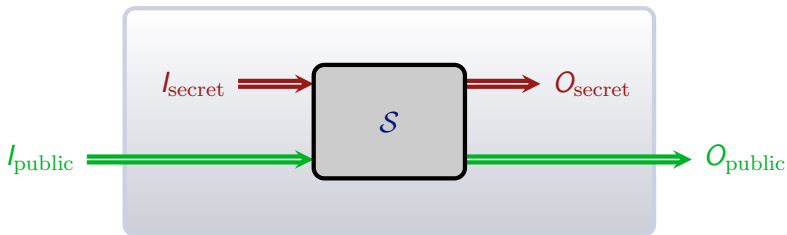

- The system  $\mathcal{S}$  is input-deterministic: for all traces  $t, t'$  of  $\mathcal{S}$

$$t =_I t' \text{ implies } t =_O t'$$

- Noninterference: for all traces  $t, t'$  of  $\mathcal{S}$

$$t =_{I_{\text{public}}} t' \text{ implies } t =_{O_{\text{public}}} t'$$

# Hyperproperties

---

- Both properties are not trace properties, but **hyperproperties**, i.e., sets of sets of traces.
- A system  $\mathcal{S}$  satisfies a hyperproperty  $H$ , if  $\text{Traces}(\mathcal{S}) \in H$ .
- Many information flow properties can be expressed as hyperproperties.

# Hyperproperties

---

- Both properties are not trace properties, but **hyperproperties**, i.e., sets of sets of traces.
- A system  $\mathcal{S}$  satisfies a hyperproperty  $H$ , if  $\text{Traces}(\mathcal{S}) \in H$ .
- Many information flow properties can be expressed as hyperproperties.

Specification languages for hyperproperties [Clarkson et al. '14]

**HyperLTL:** Extend LTL by trace quantifiers.

**HyperCTL\*:** Extend CTL\* by trace quantifiers.

# HyperLTL

---

HyperLTL = LTL +

$$\psi ::= a \mid \neg\psi \mid \psi \vee \psi \mid \mathbf{X}\psi \mid \psi \mathbf{U}\psi$$

where  $a \in AP$  (atomic propositions)

# HyperLTL

---

**HyperLTL = LTL + trace quantification**

$$\varphi ::= \exists \pi. \varphi \mid \forall \pi. \varphi \mid \psi$$

$$\psi ::= a_{\pi} \mid \neg \psi \mid \psi \vee \psi \mid \mathbf{X} \psi \mid \psi \mathbf{U} \psi$$

where  $a \in AP$  (atomic propositions) and  $\pi \in \mathcal{V}$  (trace variables).



# HyperLTL

---

**HyperLTL = LTL + trace quantification**

$$\varphi ::= \exists \pi. \varphi \mid \forall \pi. \varphi \mid \psi$$

$$\psi ::= a_{\pi} \mid \neg \psi \mid \psi \vee \psi \mid \mathbf{X} \psi \mid \psi \mathbf{U} \psi$$

where  $a \in AP$  (atomic propositions) and  $\pi \in \mathcal{V}$  (trace variables).

Shortcuts as usual:

$$\blacksquare \mathbf{F} \psi = \mathbf{true} \mathbf{U} \psi$$

$$\blacksquare \mathbf{G} \psi = \neg \mathbf{F} \neg \psi$$

# Semantics

---

$$\varphi = \forall \pi. \forall \pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

# Semantics

---

$$\varphi = \forall\pi. \forall\pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

$$\{\} \models \forall\pi. \forall\pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

# Semantics

---

$$\varphi = \forall\pi. \forall\pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

$$\{\} \models \forall\pi. \forall\pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$$\{\pi \mapsto t\} \models \forall\pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t \in T$$

# Semantics

---

$$\varphi = \forall \pi. \forall \pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

$$\{\} \models \forall \pi. \forall \pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$$\{\pi \mapsto t\} \models \forall \pi'. \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t \in T$$

$$\{\pi \mapsto t, \pi' \mapsto t'\} \models \mathbf{G}(\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t' \in T$$

# Semantics

---

$$\varphi = \forall\pi. \forall\pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

$$\{\} \models \forall\pi. \forall\pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$$\{\pi \mapsto t\} \models \forall\pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t \in T$$

$$\{\pi \mapsto t, \pi' \mapsto t'\} \models \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t' \in T$$

$$\{\pi \mapsto t[n, \infty), \pi' \mapsto t'[n, \infty)\} \models \text{on}_\pi \leftrightarrow \text{on}_{\pi'} \quad \text{for all } n \in \mathbb{N}$$

# Semantics

---

$$\varphi = \forall \pi. \forall \pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$T \subseteq (2^{\text{AP}})^\omega$  is a model of  $\varphi$  iff

$$\{\} \models \forall \pi. \forall \pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'})$$

$$\{\pi \mapsto t\} \models \forall \pi'. \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t \in T$$

$$\{\pi \mapsto t, \pi' \mapsto t'\} \models \mathbf{G} (\text{on}_\pi \leftrightarrow \text{on}_{\pi'}) \quad \text{for all } t' \in T$$

$$\{\pi \mapsto t[n, \infty), \pi' \mapsto t'[n, \infty)\} \models \text{on}_\pi \leftrightarrow \text{on}_{\pi'} \quad \text{for all } n \in \mathbb{N}$$

$$\text{on} \in t(n) \Leftrightarrow \text{on} \in t'(n)$$

# LTL vs. HyperLTL

---

LTL has many desirable properties.

1. Every satisfiable LTL formula is satisfied by an **ultimately periodic** trace, i.e., by a finite and finitely-represented model.
2. LTL and  $\text{FO}[\langle\rangle]$  are **expressively equivalent**.
3. LTL satisfiability and model-checking are  $\text{PSPACE}$ -complete.



# LTL vs. HyperLTL

---

LTL has many desirable properties.

1. Every satisfiable LTL formula is satisfied by an **ultimately periodic** trace, i.e., by a finite and finitely-represented model.
2. LTL and  $\text{FO}[\langle \rangle]$  are **expressively equivalent**.
3. LTL satisfiability and model-checking are  $\text{PSPACE}$ -complete.

Only partial results for HyperLTL.

### 3a. HyperLTL satisfiability **[F. & Hahn '16]**:

- alternation-free:  $\text{PSPACE}$ -complete
- $\exists^* \forall^*$ :  $\text{EXPSpace}$ -complete
- $\forall^* \exists^*$ : undecidable

### 3b. HyperLTL model-checking is decidable **[F. et al. '15]**.

# The Models of HyperLTL

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall \pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall\pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists\pi. a_\pi$

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall\pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists\pi. a_\pi$

$\{a\}$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\dots$

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall\pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists\pi. a_\pi$
- $\forall\pi. \exists\pi'. \mathbf{F} (a_\pi \wedge \mathbf{X} a_{\pi'})$

$\{a\}$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\emptyset$     $\dots$

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall\pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists\pi. a_\pi$
- $\forall\pi. \exists\pi'. \mathbf{F} (a_\pi \wedge \mathbf{X} a_{\pi'})$

$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\dots$
$\emptyset$	$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\dots$

# What about Finite Models?

---

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall \pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists \pi. a_\pi$
- $\forall \pi. \exists \pi'. \mathbf{F} (a_\pi \wedge \mathbf{X} a_{\pi'})$

$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\emptyset$	$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\emptyset$	$\emptyset$	$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	

The unique model of  $\varphi$  is  $\{\emptyset^n \{a\} \emptyset^\omega \mid n \in \mathbb{N}\}$ .



# What about Finite Models?

Fix  $AP = \{a\}$  and consider the conjunction  $\varphi$  of

- $\forall \pi. (\neg a_\pi) \mathbf{U} (a_\pi \wedge \mathbf{XG} \neg a_\pi)$
- $\exists \pi. a_\pi$
- $\forall \pi. \exists \pi'. \mathbf{F} (a_\pi \wedge \mathbf{X} a_{\pi'})$

$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\emptyset$	$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\emptyset$	$\emptyset$	$\{a\}$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	...
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	

The unique model of  $\varphi$  is  $\{\emptyset^n \{a\} \emptyset^\omega \mid n \in \mathbb{N}\}$ .

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any finite set of traces.*

# What about Countable Models?

---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

# What about Countable Models?

---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .

# What about Countable Models?

---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .



# What about Countable Models?


---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .



# What about Countable Models?


---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .

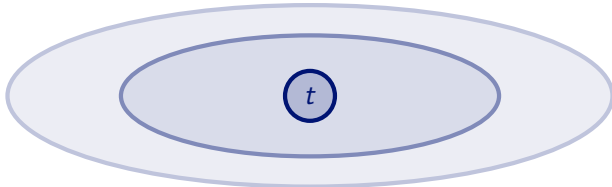

# What about Countable Models?


---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .

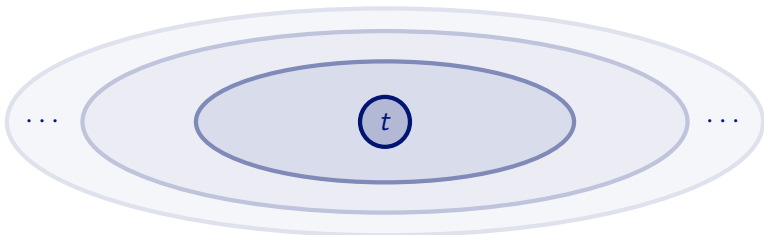

# What about Countable Models?


---

## Theorem

*Every satisfiable HyperLTL sentence has a countable model.*

## Proof

- W.l.o.g.  $\varphi = \forall \pi_0. \exists \pi'_0. \dots \forall \pi_k. \exists \pi'_k. \psi$  with quantifier-free  $\psi$ .
- Fix a Skolem function  $f_j$  for every existentially quantified  $\pi'_j$ .

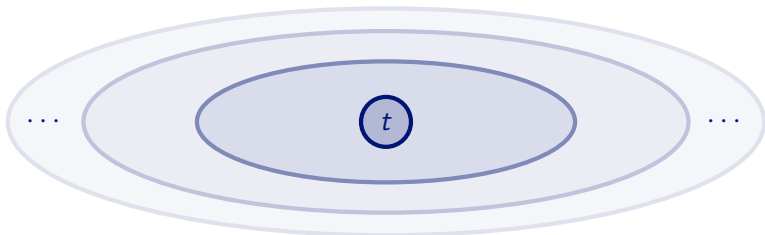

The limit is a model of  $\varphi$  and countable.



# What about Regular Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

# What about Regular Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..

1. ..  $(\{a\}\{b\})^n\emptyset^\omega$  for every  $n$ .

# What about Regular Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..  $\{a\} \{b\} \{a\} \{b\} \{a\} \{b\} \emptyset^\omega$

1. ..  $(\{a\}\{b\})^n \emptyset^\omega$  for every  $n$ .

# What about Regular Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..  $\{a\} \{b\} \{a\} \{b\} \{a\} \{b\} \emptyset^\omega$

1. ..  $(\{a\}\{b\})^n \emptyset^\omega$  for every  $n$ .
2. .. for every trace of the form  $x\{b\}\{a\}y$  in  $T$ , also the trace  $x\{a\}\{b\}y$ .

# What about Regular Models?

---


## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..

1. ..  $(\{a\}\{b\})^n\emptyset^\omega$  for every  $n$ .
2. .. for every trace of the form  $x\{b\}\{a\}y$  in  $T$ , also the trace  $x\{a\}\{b\}y$ .



# What about Regular Models?

---


## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..

1. ..  $(\{a\}\{b\})^n\emptyset^\omega$  for every  $n$ .
2. .. for every trace of the form  $x\{b\}\{a\}y$  in  $T$ , also the trace  $x\{a\}\{b\}y$ .

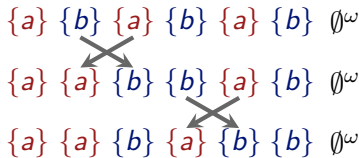

# What about Regular Models?


## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..

1. ..  $(\{a\}\{b\})^n\emptyset^\omega$  for every  $n$ .
2. .. for every trace of the form  $x\{b\}\{a\}y$  in  $T$ , also the trace  $x\{a\}\{b\}y$ .

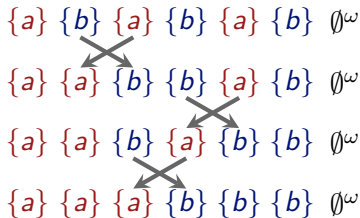

# What about Regular Models?


## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any  $\omega$ -regular set of traces.*

## Proof

Express that a model  $T$  contains..

1. ..  $(\{a\}\{b\})^n\emptyset^\omega$  for every  $n$ .
2. .. for every trace of the form  $x\{b\}\{a\}y$  in  $T$ , also the trace  $x\{a\}\{b\}y$ .

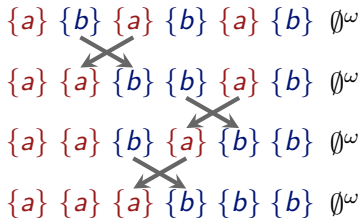

Then,  $T \cap \{a\}^*\{b\}^*\emptyset^\omega = \{\{a\}^n\{b\}^n\emptyset^\omega \mid n \in \mathbb{N}\}$  is not  $\omega$ -regular.



# What about Ultimately Periodic Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any set of traces that contains an ultimately periodic trace.*

# What about Ultimately Periodic Models?

---

## Theorem

*There is a satisfiable HyperLTL sentence that is not satisfied by any set of traces that contains an ultimately periodic trace.*

One can even encode the prime numbers in HyperLTL!

# First-order Logic for Hyperproperties

# First-order Logic vs. LTL

---

$FO[\prec]$ : first-order order logic over signature  $\{\prec\} \cup \{P_a \mid a \in AP\}$  over structures with universe  $\mathbb{N}$ .

## Theorem (Kamp '68, Gabbay et al. '80)

*LTL and  $FO[\prec]$  are expressively equivalent.*

# First-order Logic vs. LTL

---

FO[<]: first-order order logic over signature  $\{<\} \cup \{P_a \mid a \in AP\}$  over structures with universe  $\mathbb{N}$ .

## Theorem (Kamp '68, Gabbay et al. '80)

*LTL and FO[<] are expressively equivalent.*

### Example

$$\forall x(P_q(x) \wedge \neg P_p(x)) \rightarrow \exists y(x < y \wedge P_p(y))$$


and

$$\mathbf{G}(q \rightarrow \mathbf{F} p)$$

are equivalent.


# First-order Logic for Hyperproperties

---




# First-order Logic for Hyperproperties

---

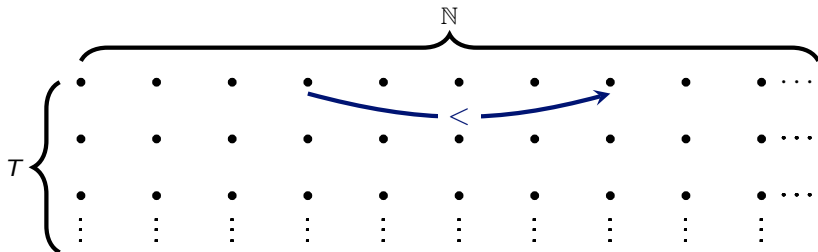


# First-order Logic for Hyperproperties

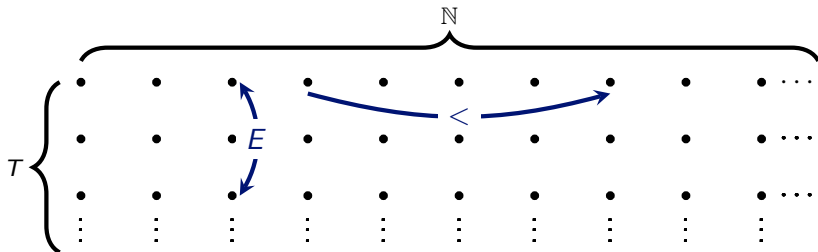



# First-order Logic for Hyperproperties

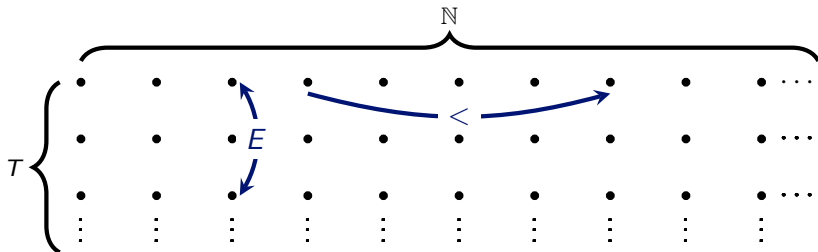


- $\text{FO}[<, E]$ : first-order logic with equality over the signature  $\{<, E\} \cup \{P_a \mid a \in \text{AP}\}$  over structures with universe  $T \times \mathbb{N}$ .

## Example

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

# First-order Logic for Hyperproperties

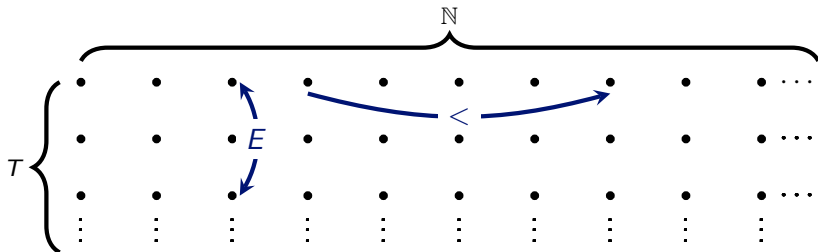

- $\text{FO}[<, E]$ : first-order logic with equality over the signature  $\{<, E\} \cup \{P_a \mid a \in \text{AP}\}$  over structures with universe  $T \times \mathbb{N}$ .

## Proposition

*For every HyperLTL sentence there is an equivalent  $\text{FO}[<, E]$  sentence.*

# A Setback

---

- Let  $\varphi$  be the following property of sets  $T \subseteq (2^{\{p\}})^\omega$ :

There is an  $n$  such that  $p \notin t(n)$  for every  $t \in T$ .

## Theorem (Bozzelli et al. '15)

*$\varphi$  is not expressible in HyperLTL.*

# A Setback

---

- Let  $\varphi$  be the following property of sets  $T \subseteq (2^{\{p\}})^\omega$ :

There is an  $n$  such that  $p \notin t(n)$  for every  $t \in T$ .

## Theorem (Bozzelli et al. '15)

$\varphi$  is not expressible in HyperLTL.

- But,  $\varphi$  is easily expressible in  $\text{FO}[\prec, E]$ :

$$\exists x \forall y E(x, y) \rightarrow \neg P_p(y)$$

## Corollary

$\text{FO}[\prec, E]$  strictly subsumes HyperLTL.

# HyperFO

---

- $\exists^M x$  and  $\forall^M x$ : quantifiers restricted to initial positions.
- $\exists^G y \geq x$  and  $\forall^G y \geq x$ : if  $x$  is initial, then quantifiers restricted to positions on the same trace as  $x$ .

- $\exists^M x$  and  $\forall^M x$ : quantifiers restricted to initial positions.
- $\exists^G y \geq x$  and  $\forall^G y \geq x$ : if  $x$  is initial, then quantifiers restricted to positions on the same trace as  $x$ .

**HyperFO:** sentences of the form

$$\varphi = Q_1^M x_1 \cdots Q_k^M x_k \cdot Q_1^G y_1 \geq x_{g_1} \cdots Q_\ell^G y_\ell \geq x_{g_\ell} \cdot \psi$$

- $Q \in \{\exists, \forall\}$ ,
- $\{x_1, \dots, x_k\}$  and  $\{y_1, \dots, y_\ell\}$  are disjoint,
- every guard  $x_{g_j}$  is in  $\{x_1, \dots, x_k\}$ , and
- $\psi$  is quantifier-free over signature  $\{<, E\} \cup \{P_a \mid a \in AP\}$  with free variables in  $\{y_1, \dots, y_\ell\}$ .

# Equivalence

---

## Theorem

*HyperLTL and HyperFO are equally expressive.*

## Theorem

*HyperLTL and HyperFO are equally expressive.*

## Proof

- From HyperLTL to HyperFO: structural induction.
- From HyperFO to HyperLTL: reduction to Kamp's theorem.



# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$


$$\forall^M x_1 \forall^M x_2 \forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$

# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^M x_1 \forall^M x_2 \forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$




# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$




# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$

$$\forall y_1 \forall y_2 (y_1 = y_2) \rightarrow (P_{(\text{on}, 1)}(y_1) \leftrightarrow P_{(\text{on}, 2)}(y_2))$$



# From HyperFO to HyperLTL


---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$

$$\forall y_1 \forall y_2 (y_1 = y_2) \rightarrow (P_{(\text{on}, 1)}(y_1) \leftrightarrow P_{(\text{on}, 2)}(y_2))$$

$$\mathbf{G}((\text{on}, 1) \leftrightarrow (\text{on}, 2))$$



# From HyperFO to HyperLTL


---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^M x_1 \forall^M x_2 \forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$

$$\forall y_1 \forall y_2 (y_1 = y_2) \rightarrow (P_{(\text{on}, 1)}(y_1) \leftrightarrow P_{(\text{on}, 2)}(y_2))$$

$$\mathbf{G}((\text{on}, 1) \leftrightarrow (\text{on}, 2))$$



# From HyperFO to HyperLTL

---

$$\forall x \forall x' E(x, x') \rightarrow (P_{\text{on}}(x) \leftrightarrow P_{\text{on}}(x'))$$

$$\forall^M x_1 \forall^M x_2 \forall^G y_1 \geq x_1 \forall^G y_2 \geq x_2 E(y_1, y_2) \rightarrow (P_{\text{on}}(y_1) \leftrightarrow P_{\text{on}}(y_2))$$

$$\forall y_1 \forall y_2 (y_1 = y_2) \rightarrow (P_{(\text{on}, 1)}(y_1) \leftrightarrow P_{(\text{on}, 2)}(y_2))$$

$$\mathbf{G}((\text{on}, 1) \leftrightarrow (\text{on}, 2))$$

$$\forall \pi_1 \forall \pi_2 \mathbf{G}(\text{on}_{\pi_1} \leftrightarrow \text{on}_{\pi_2})$$

$$\pi_1 \mapsto \begin{array}{cccc} \{\text{on}\} & \{\text{on}\} & \emptyset & \{\text{on}\} \dots \end{array}$$

$$\pi_2 \mapsto \begin{array}{cccc} \{\text{on}\} & \emptyset & \emptyset & \{\text{on}\} \dots \end{array}$$



# Conclusion

---

## Our Results

- The models of HyperLTL are rather **not well-behaved**, i.e., in general (countably) infinite, non-regular, and non-periodic.
- $\text{FO}[\prec, E]$  is strictly **more expressive** than HyperLTL.
- HyperFO is **expressively equivalent** to HyperLTL.

# Conclusion

---

## Our Results

- The models of HyperLTL are rather **not well-behaved**, i.e., in general (countably) infinite, non-regular, and non-periodic.
- $\text{FO}[\langle, E]$  is strictly **more expressive** than HyperLTL.
- HyperFO is **expressively equivalent** to HyperLTL.

## Open Problems

- Is there a class of languages  $\mathcal{L}$  such that every satisfiable HyperLTL sentence has a model from  $\mathcal{L}$ ?
- Is there a temporal logic that is expressively equivalent to  $\text{FO}[\langle, E]$ ?
- What about HyperCTL\*?